


PERFIL RECTANGULAR

PARA USO ESTRUCTURAL
E INDUSTRIAL
NORMA ASTM A500

Características generales:
Largo Normal : 6 mts.
Otros Largos : Apedido

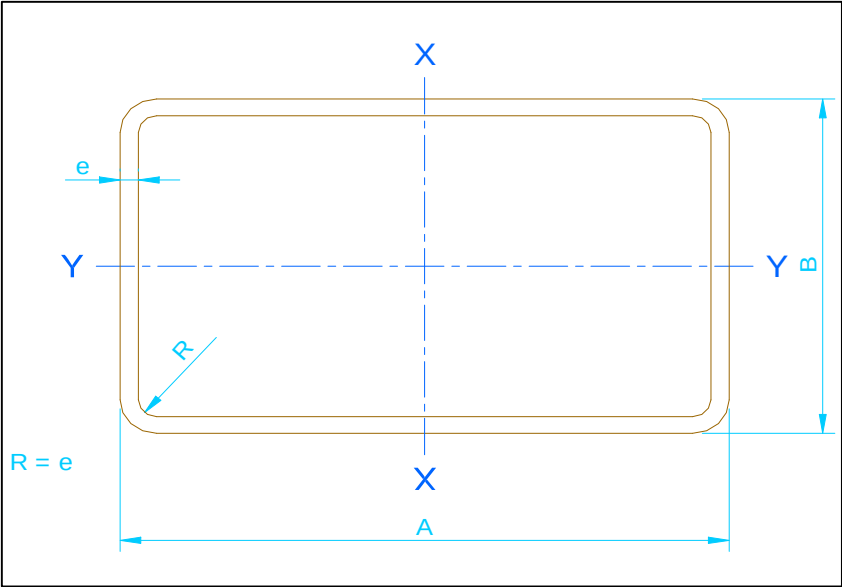

Dimensiones			Peso P	Tiras / Paquetes
a	b	Espesor		
	mm	mm	kg/mt	
20	10	1,0	0,42	100
		1,2	0,50	100
		1,5	0,59	100
25	10	1,0	0,50	100
		1,5	0,80	100
25	15	1,0	0,58	120
		1,5	0,83	120
30	10	1,0	0,58	100
		1,2	0,71	100
		1,5	0,83	100
28	18	2,0	1,17	100
		1,0	0,66	100
		1,5	1,00	100
		2,0	1,27	100
30	20	1,0	0,73	100
		1,2	0,91	100
		1,5	1,06	100
		2,0	1,36	100
35	15	1,0	0,73	100
		1,5	1,06	100
		2,0	1,52	100
35	25	1,0	0,89	100
		1,5	1,30	100
		2,0	1,68	100
38	18	1,0	0,80	100
		1,5	1,22	100
		2,0	1,56	100
40	20	1,0	0,89	100
		1,5	1,30	100
		2,0	1,68	100

Dimensiones			Peso P	Tiras / Paquetes
a	b	Espesor		
mm	mm	mm	kg/mt	
40	30	1,0	1,05	80
		1,5	1,53	80
		2,0	1,99	80
50	20	1,5	1,53	100
		2,0	1,99	100
50	30	1,0	1,2	100
		1,5	1,77	100
		2,0	2,31	100
		3,0	3,3	80
60	40	1,5	2,24	64
		2,0	2,93	64
		3,0	4,25	63
		4,0	5,45	42
70	30	1,5	2,24	70
		2,0	2,93	70
		3,0	4,25	63
80	40	1,5	2,67	72
		2,0	3,56	72
		3,0	5,19	48
		4,0	6,71	36
100	50	2,0	4,5	42
		3,0	6,6	42
		4,0	8,59	30
		5,0	10,48	24
150	50	2,0	6,07	24
		3,0	8,96	24
		4,0	11,73	20
		5,0	14,41	20