


TUBOS REDONDOS

PARA USO ESTRUCTURALES
E INDUSTRIALES
NORMA ASTM A500

Características generales:
Largo Normal : 6 mts.
Otros Largos : Apedido

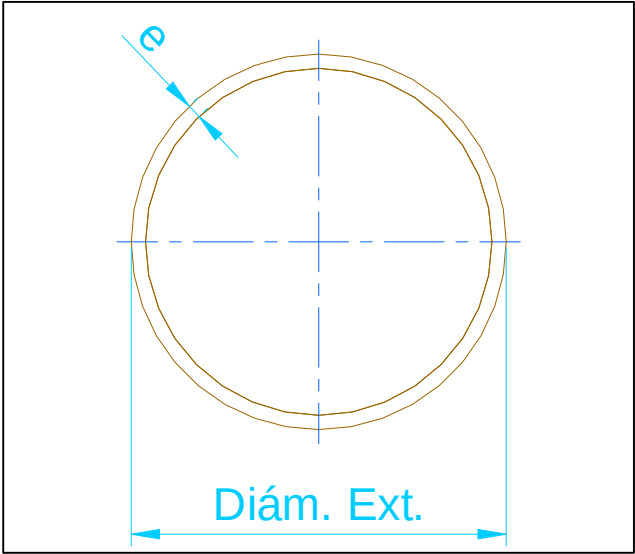

Designación		Espesor	Peso	Tiras / Paquetes
Diámetro Exterior				
Pulg.	mm	e	P	
Pulg.	mm	mm	kg/mt	
5/8	15,88	1,0	0,37	200
		1,2	0,46	200
		1,5	0,53	200
		2,0	0,68	200
3/4	19,05	1,0	0,45	200
		1,2	0,55	200
		1,5	0,65	200
		2,0	0,84	200
7/8	22,22	1,0	0,52	200
		1,2	0,65	200
		1,5	0,77	200
		2,0	1,00	200
1	25,4	1,0	0,60	100
		1,2	0,74	100
		1,5	0,88	100
		2,0	1,15	100
1.1/4	31,75	1,0	0,76	100
		1,2	0,93	100
		1,5	1,12	100
		2,0	1,47	100
1.1/2	38,1	1,0	0,91	91
		1,2	1,12	91
		1,5	1,35	91
		2,0	1,78	91

Designación		Espesor	Peso	Tiras / Paquetes
Diámetro Exterior				
Pulg.	mm	e	P	
Pulg.	mm	mm	kg/mt	
1.3/4	44,45	1,0	1,07	92
		1,2	1,30	92
		1,5	1,59	92
		2,0	2,09	92
2	50,8	1,0	1,23	91
		1,2	1,50	91
		1,5	1,82	91
		2,0	2,41	91
2.1/2	63,5	3,0	3,54	91
		1,5	2,29	51
		2,0	3,03	51
		3,0	4,48	51
3	76,2	1,5	2,81	37
		2,0	3,66	37
		3,0	5,42	37
		4,0	7,12	37
3.1/2	88,9	1,5	3,36	37
		2,0	4,43	37
		3,0	6,36	37
		4,0	8,38	24
4	101,6	2,0	4,91	24
		3,0	7,29	24
		4,0	9,63	24
		5,0	11,90	24
5	127	3,0	9,17	19
		4,0	12,10	19
		5,0	15,00	19